



Quick, easy, accurate vital signs at an affordable price.



Advancing Frontline Care™

Distributed by:

Independent Medical Associates

11733 66th Street North Suite 113 Largo, FL 33773 Phone: 888-548-4462 Fax: 888-548-1462 E-Mail: Info@l-MA.com Welch Allyn Spot Vital Signs®

Quick, Easy to Use and Affordably Priced.


Welch Allyn Spot Vital Signs has made its mark in ambulatory and acute care settings for its accuracy, durability and cost-effectiveness. Now with updated features, the fully automated, multiparameter Spot Vital Signs has become the device of choice for frontline caregivers world-wide.



Hospital-grade equipment now offers enhanced clinical performance and quality.

- > Fast and accurate—completes BP, pulse rate, temperature, and SpO₂ in approximately 30 seconds
- > Multiparameter and modular so you can select precisely the vital signs you need
- > Optional Masimo® or Nellcor® pulse oximetry
- > Optional SureTemp[®] thermometry
- > IR connectivity to interface with computerized patient records* *Contact your local sales representative at 1.800 535.6663 or visit www.welchallyn.com.

- > Portable-carry it, wheel it, or mount it
- > Big, bright, easy-to-read LCD screen
- > Offers you one of the lowest priced multiparameter instruments on the market
- > Fully upgradeable to meet your changing needs
- > Integrated long-life battery enhances portability and continuous operation

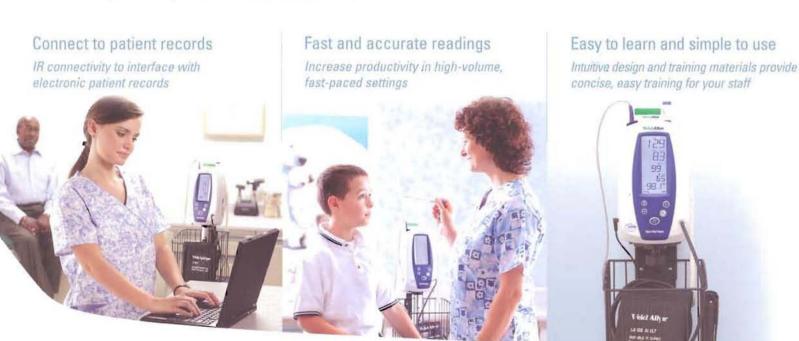



Affordable, multiparameter functionality to meet your vital signs needs

Spot Vital Signs Base Unit:

Blood Pressure

Noninvasive blood pressure using the oscillometric method.

Pulse rate and Mean Arterial Pressure included.

Optional Features:

Temperature

SureTemp® thermometry gives you the versatility to obtain oral, axillary and rectal temperatures with the speed you want and accuracy you demand:

- > Oral—approx. 4 seconds
- > Axillary—approx. 10 seconds
- > Rectal—approx. 15 seconds

Pulse Oximetry

Spot Vital Signs can be configured with the latest pulse oximetry technology from either Masimo or Nellcor for accurate SpO_2 and pulse rate readings.

IR Connectivity

Data can be transferred from the device into patients' medical records via the IR connection.



SPECIFICATIONS

Noninvasive Blood Pressure (NIBP)

Cutt Pressure Range

0 to 300 mmHg

Initial Cuff Inflation

160 mmHg (adjustable)

60 to 250 mmHg

Diastolic Range

30 to 160 mmHg

Mean Arterial Pressure Range 40 to 190 mmHg

Blood Pressure Accuracy Blood pressure meets or exceeds SP10.1992 AAMI standards

Blood Pressure Determination Time 20-45 seconds typical

Overpressure Cutoff

 $315 \text{ mmHg} \pm 15 \text{ mmHg}$

Pulse Rate Range (using BP determination) 40 to 200 bpm

Pulse Rate Accuracy (using BP determination)

Temperature

Measurement Range Calibration Accuracy Determination Time

86 °F to 109.4 °F (30 °C to 43 °C) ± 0.2 °F (± 0.1 °C) (Monitor Mode) Oral-Approximately 4 seconds

Axillary-Approximately 10 seconds Rectal—Approximately 15 seconds

Probe

Oral/Axillary-Blue cap Rectal -Red cap

SpO:

Performance

70% to 100%

Measurement Range

Pulse Rate Range 25 to 240 bom

Ordering Information

4200B Spot Vital Signs—BP only (includes Pulse Rate and MAP)

420TB Spot Vital Signs-BP, Temperature

42M0B Spot Vital Signs-BP, Masimo Pulse Oximetry 42N0B Spot Vital Signs-BP, Nellcor Pulse Oximetry

42MTB Spot Vital Signs-BP, Masimo Pulse Oximetry, Temperature 42NTB Spot Vital Signs-BP, Nellcor Pulse Oximetry, Temperature

4200-60 Mobile Stand 4200-62 Wall Mount

4200-64 IV Pole Mount

4200-170 Connectivity Accessory Kit with PC IR Adapter

Note: For all models above, use a letter suffix to designate language and a number to designate voltage (e.g., 42M0B-E1).

Languages: E=English, F=French, G=German, I=Italian, S=Spanish, P=Portuguese, C=Chinese Voltages: 1=North America, 2=Europe, 4=UK, 6=Australia

Only Masimo SET SpO2 sensors, including LNOP durable adhesive and NR value disposable sensors should be used with Masimo pulse oximetry. Masimo, Masimo SET, LNOP, and NR are registered trademarks of Masimo Corporation.

NELLCOR

Only Nellcor OxiMax* pulse oximetry sensors should be used with the Nellcor pulse oximetry option. Nellcor and OxiMax are registered trademarks of Nellcor Puritan Bennett, Inc.

WelchAllyn

Advancing Frontline Care "

SpO, Accuracy

Masimo: ± 2 digits

Nellcor: ± 3 digits

Pulse Rate Accuracy

Masimo: ± 3 digits Nellcor: ± 3 digits

Mechanical

Height: 9.7 in (24.6 cm)

Length: 5.7 in (14.5 cm)

Depth: 4.7 in (12.0 cm)

Approximately 4.6 lbs (2.1 kg)

Electrical

AC Power Supply

7.2 V DC at 1.0 A

Rechargeable sealed lead acid internal battery

Battery Recharge Time

90% to 100% after 12 hours Simultaneously operates device and charges battery when

AC power adapter is plugged in

Operating Time

A fully charged battery supports 150 typical blood pressure

determinations at 7-minute intervals

Environmental

Operating Temperature

Humidity

Operating Altitude

Storage Temperature Storage Humidity

50 °F to 104 °F (10 °C to 40 °C) 15% to 90% (noncondensing)

-557 ft to +16,000 ft (-170 m to +4,877 m) -4 °F to 122 °F (-20 °C to 50 °C) 15% to 90% (noncondensing)

IEC/EN 60601-1-2

Warranty

Two-year warranty on parts and labor

