


Distributed By:



www.I-MA.com
info@I-MA.com
p: 888.548.4462
f: 888-548-1462



FIBER OPTIC MALLEABLE STYLETTE 00-469 & 00-470

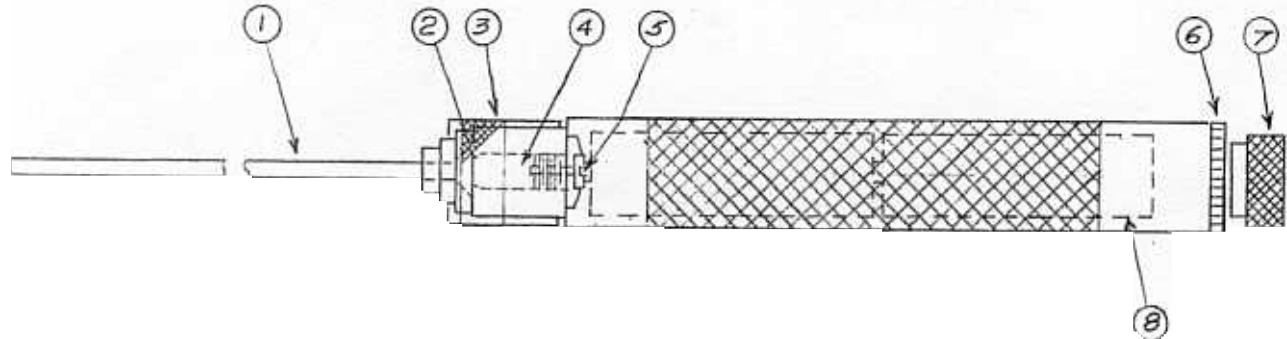

1. Stylette: (Adult: 00-469-1) (Pediatric: 00-470-1)
2. Lamp Retainer
3. Stylette Retainer
4. Lamp (PN 00-355-XB-1)
5. Lamp Contact
6. Cap
7. On-Off Switch (Rotate CW to turn ON)
8. Batteries (2) AA size, (PN P-154-AA, not supplied)

CLEANING AND STERILIZING INSTRUCTIONS

See separate "Cleaning and Sterilization Suggestion Sheet" for cleaning and sterilization procedures and information.

Caution:

- Stylette Retainer (3) must be tight to keep stylette (1) from moving.
- Cap (6) must be tight after installing batteries to prevent turning while using ON-OFF switch (7).
- Be sure switch (7) is in OFF position (CCW) when not in use.
- Stylette – Do Not Exceed 165 Degrees F.

To Replace Lamp (4):

- Remove stylette retainer (3) and stylette (1).
- Remove lamp retainer (2) using a notched spanner driver.
- Unscrew lamp (4) and replace with new unit. Do not over tighten the lamp.
- Replace the lamp retainer (2). Do not over tighten.

**The Hallmark of Quality, Service and Innovation in Anesthesia and Respiratory Care Products
Since 1958**